

Ratings

Temperature: 0 ~ 70 °C
 Voltage: 150 V

Conductor

Gauge: 32 AWG, 0.039 mm²
 Material: tinned copper strands
 Stranding: $\phi 0.05 \times 19$
 Resistance at 20 °C: 590 Ω /km

Insulator

Material: HDPE
 Color: black, white, red
 Outer diameter: $\phi 0.55 \pm 0.05$ mm
 Nominal thickness: 0.15 mm
 Resistance at 20 °C: 1000 M Ω /km

Shield

Type: spiral
 Material: tinned copper strands
 Strand size: $\phi 0.08$ mm
 Coverage: 90 % minimum

Outer jacket



Material: TPU, 70 °C
 Color: black
 Nominal thickness: 0.50 mm
 Diameter: $\phi 2.5 \pm 0.15$ mm

Filler

Material: kevlar

Tests

Tensile strength: 25.5 kgf
 Dielectric test: 1500 V dc for 1 minute without breakdown
 Bend test at 200 g, $\pm 90^\circ$, 30 cycles /min: 10,000 cycle minimum

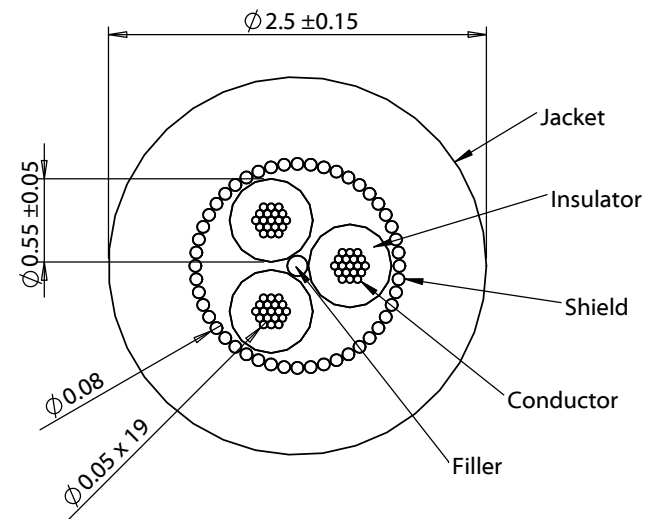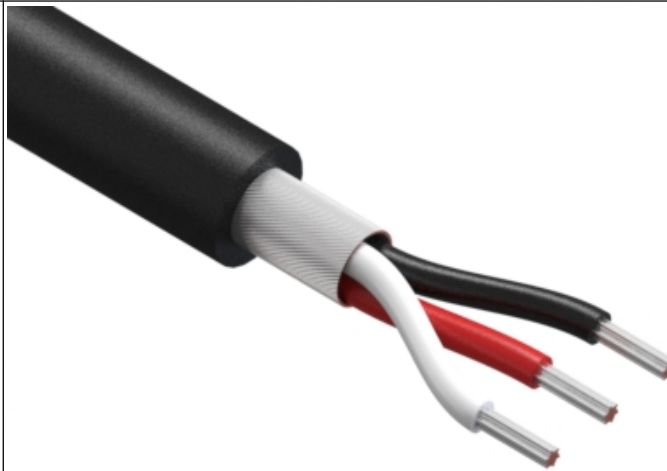

REVISION	DATE	DESCRIPTION	PREPARED:	NOTES	TENSILITY 20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 800 877.670.7118 www.tensility.com		
A	7/31/2015	Initial release		RoHS and REACH compliant			
A1	1/13/2016	Updated notes, corrected tolerances	VERIFIED:	Jacket meets ISO 10993 Biological Compatibility	A	30-00494	
				Phthalate and halogen free	SCALE: 1:1		
			DIMENSIONS ARE IN MILLIMETERS	Function test: no open, no short, no intermittent	SHEET 1 OF 1		
			TOLERANCES: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	DESCRIPTION: Wire, 3C TS, 32 AWG, 150V, 70C, 2.5 mm, spiral shield, TPU			