Ratings
Temperature: 0 ~ 70 °C
Voltage: 150 V

Conductor
Gauge: 26 AWG, 0.13 mm²
Material: tinned copper strands
Stranding: ∅0.08 x 26
Resistance at 20 °C: 150 Ω/km max

Insulator
Material: HDPE
Color: black, white, yellow, red
Outer diameter: ∅0.9 ±0.10 mm
Nominal thickness: 0.20 mm
Resistance at 20 °C: 1000 MΩ/km min

Shield
Type: spiral
Material: tinned copper strands
Strand size: ∅0.08
Coverage: 90 % minimum

Outer jacket
Material: TPU, 70 °C
Color: cool gray 9C
Nominal thickness: 0.50 mm
Diameter: ∅3.4 ±0.15 mm

Filler
Material: kevlar

Tests
Tensile strength: 35.7 kgf
Dielectric test: 1500 V dc for 1 minute without breakdown
Bend test at 200 g, ±90 °, 30 cycles /min: 15,000 cycle minimum

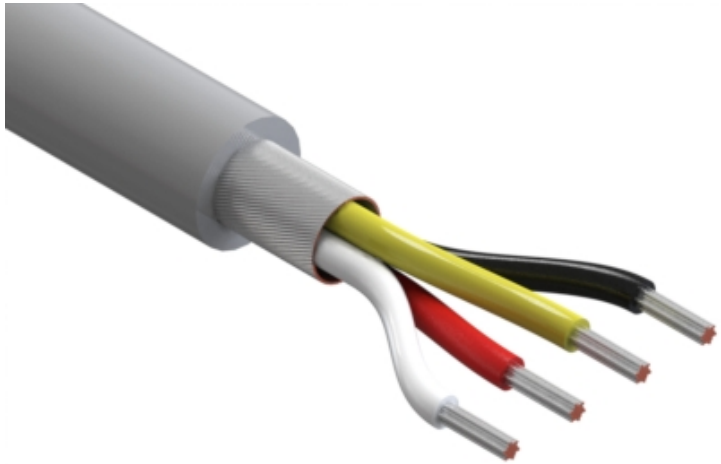

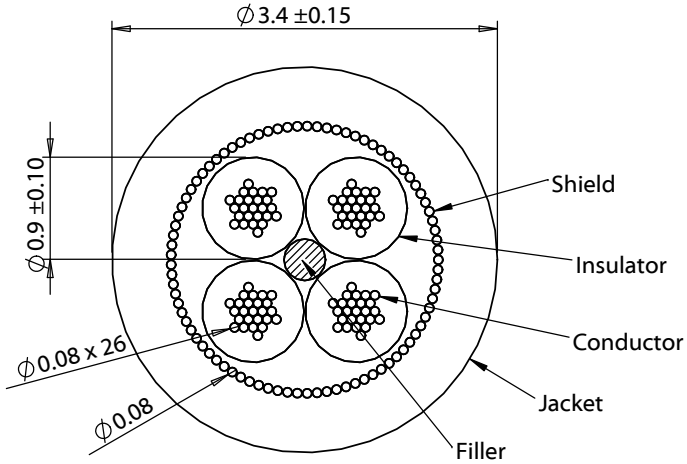

REVISION	DATE	DESCRIPTION
A	9/28/2015	Initial release
A1	1/13/2016	Updated notes, corrected tolerances

PREPARED: AG 2016.01.13 10:10:15 -08'00'

VERIFIED: LA Digitally signed by LA DN: cn=LA, o=Tensility, ou=Engineering, email=QA002@Tensility.com, c=US Date: 2016.01.13 14:55:24 -08'00'

DIMENSIONS ARE IN MILLIMETERS

TOLERANCES:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

NOTES
RoHS and REACH compliant

Jacket meets ISO 10993 for biological compatibility

Phthalate and halogen free

Function test: no open, no short, no intermittent

DESCRIPTION:
Wire, 4C TS, 26 AWG, 150V, 70C, 3.4 mm, spiral shield, TPU, gray

TENSILITY
20802 Sockeye Place #130
Bend, OR 97701 USA
tel 541.323.3228 *fax* 541.323.4202
800 877.670.7118 www.tensility.com

SIZE	PART NUMBER
A	30-00449

SCALE: 1:1 | SHEET 1 OF 1

5 4 3 2 1