






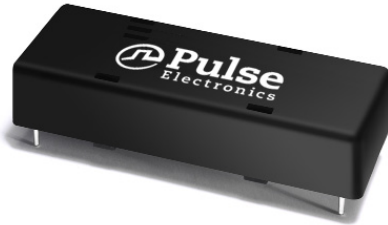

XDSL Splitter Filter Module

BX8214 / BX8214NL

Smart Series



-  POTS Central Office Splitter for standard ADSL applications
-  For use with ANSI T1.413 standard
-  This module is part of a standard series with footprint compatibility
-  Patent Approved
-  ADSL2+ compatible
-  NL version: RoHS-6 compliant

Electrical Specifications @ 25°C - Operating Temperature -40°C to +85°C

Parameter	Frequency	
POTS Impedance	100Hz to 4kHz	800 Ω 100 Ω + 50nF
POTS Insertion Loss	1kHz	0.6dB MAX
POTS Attenuation Distortion relative to 1kHz	200Hz to 3.4kHz	-1.5 to +0.5dB
NOTE: Attenuation is positive value, gain is negative	3.4kHz to 4kHz	-1.5 to +1.0dB
POTS Delay Distortion	600Hz to 4kHz	200μSEC MAX
POTS Return Loss	200Hz (SRL-L)	5dB MIN
	1kHz (ERL)	8dB MIN
	2.2kHz (SRL-H)	5dB MIN
Intermodulation Distortion (2nd and 3rd harmonics)	4-Tone IEEE 743 signal	-60dB MIN
Longitudinal Balance	200Hz to 3.2kHz	-58dB MIN
Tip to Ring Capacitance	20Hz to 30Hz	115nF MAX
ADSL Insertion Loss	30kHz to 300kHz	-65dB MIN
	300kHz to 2.2MHz	-55dB MIN
ADSL Input Impedance Loading	30kHz to 2.2MHz	0.25dB MAX
DC Current		100mA MAX
Total DC Resistance		25Ω MAX
Tip to Ring Isolation		600Vdc MIN

Notes: For VDSL2 (30MHz) compatible version, refer to BX8214V.


XDSL Splitter Filter Module

BX8214 / BX8214NL


Smart Series

Mechanical

BX8214 / BX8214NL

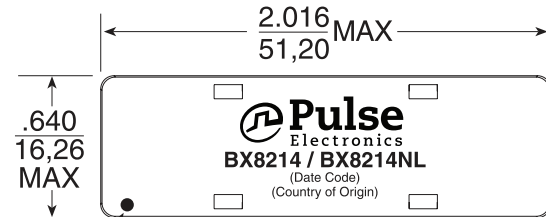

Pin 1


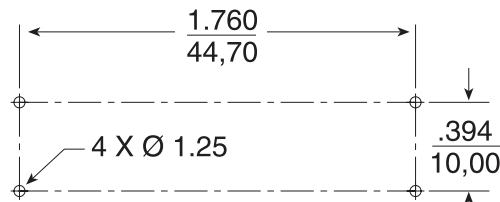


Weight15 grams


Tray35/tray

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are $\pm \frac{.004}{0,10}$

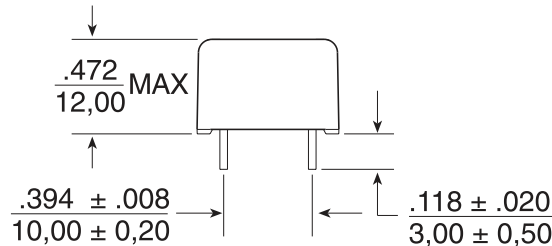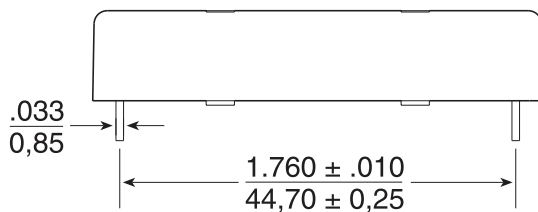

Schematic

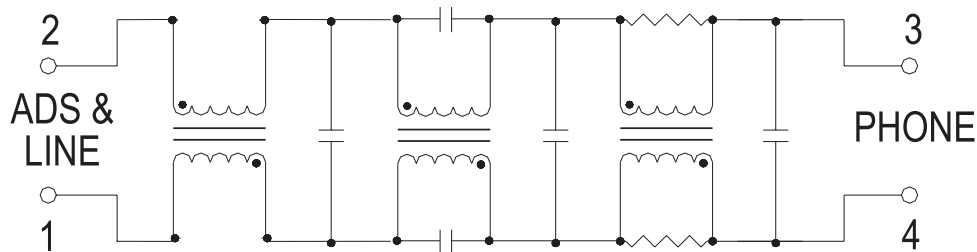

For More Information

Pulse Worldwide Headquarters
12220 World Trade Drive
San Diego, CA 92128
U.S.A.

Pulse Europe
Einsteinstrasse 1
D-71083 Herrenberg
Germany

Pulse China Headquarters
B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Road
High-Tech Zone
Nanshan District
Shenzhen, PR China
518057
Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China
Room 2704/2705
Super Ocean Finance
Ctr.
2067 Yan An Road
West
Shanghai 200336
China
Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia
135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363
Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia
3F, No. 198
Zhongyuan Road
Zhongli City
Taoyuan County 320
Taiwan R. O. C.
Tel: 886 3 4356768
Fax: 886 3 4356823 (Pulse)
Fax: 886 3 4356820 (FRE)

Tel: 858 674 8100
Fax: 858 674 8262

Tel: 49 7032 78060
Fax: 49 7032 7806 135

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2012. Pulse Electronics, Inc. All rights reserved.