
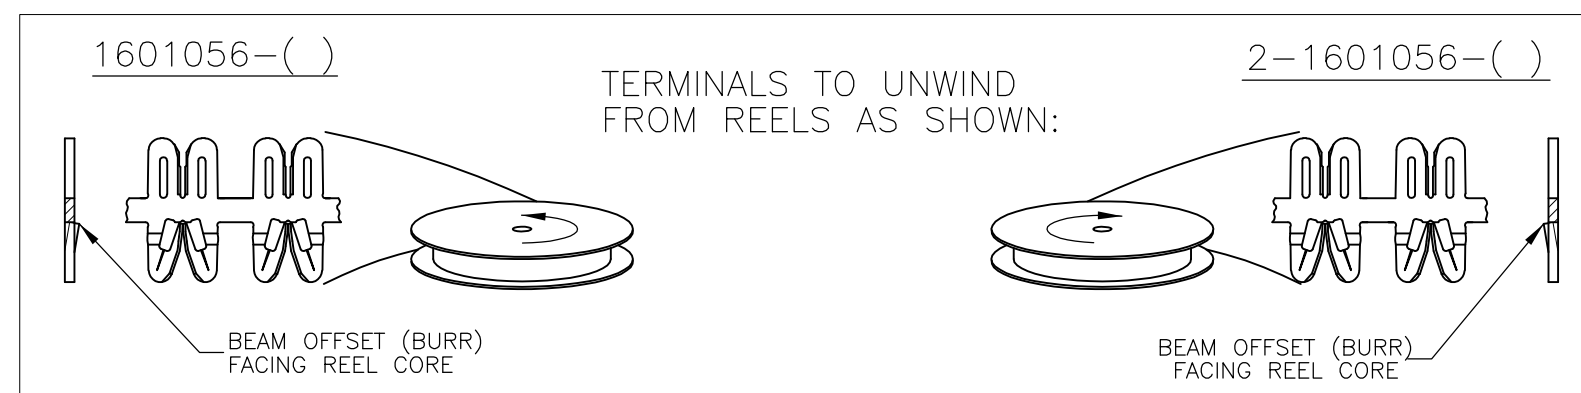
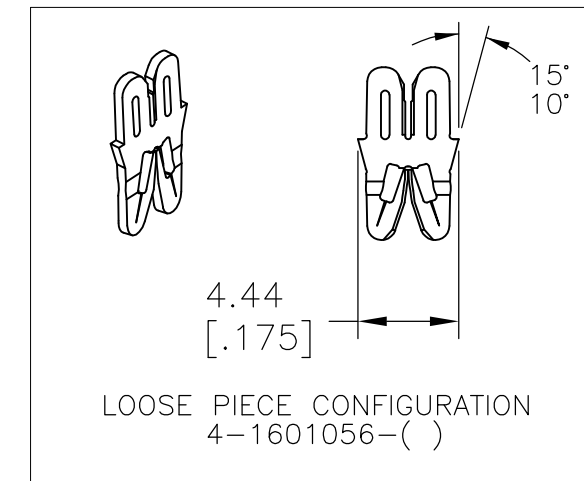


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
AF	50	C		REVISED PER ECR-10-007124	18MAY10	HMR	GJ

- SPECIFICATIONS: MAGNET WIRE #18 - #34 AWG, 1.02mm(.040")-0.16mm(.006") DIA COPPER. LEAD WIRE #20 AWG, (0.5mm<sup>2</sup>) STRANDED, BONDED OR SOLID. INSULATED LEAD WIRE. MAX INSULATION O.D. 2.9mm(.115") NO STRIPPING REQUIRED.
- POCKET RECOMMENDATION: #1601421
- TERMINALS APPLICATION TO COMPLY WITH TYCO ELECTRONICS SPECIFICATION 114-13166 FIGURE 3.
- SPECIAL PACKAGING. SPLICE FREE.
- PRELIMINARY - NOT FOR PRODUCTION.
- TWO (2) TERMINALS SHOWN FOR ILLUSTRATION PURPOSES ONLY

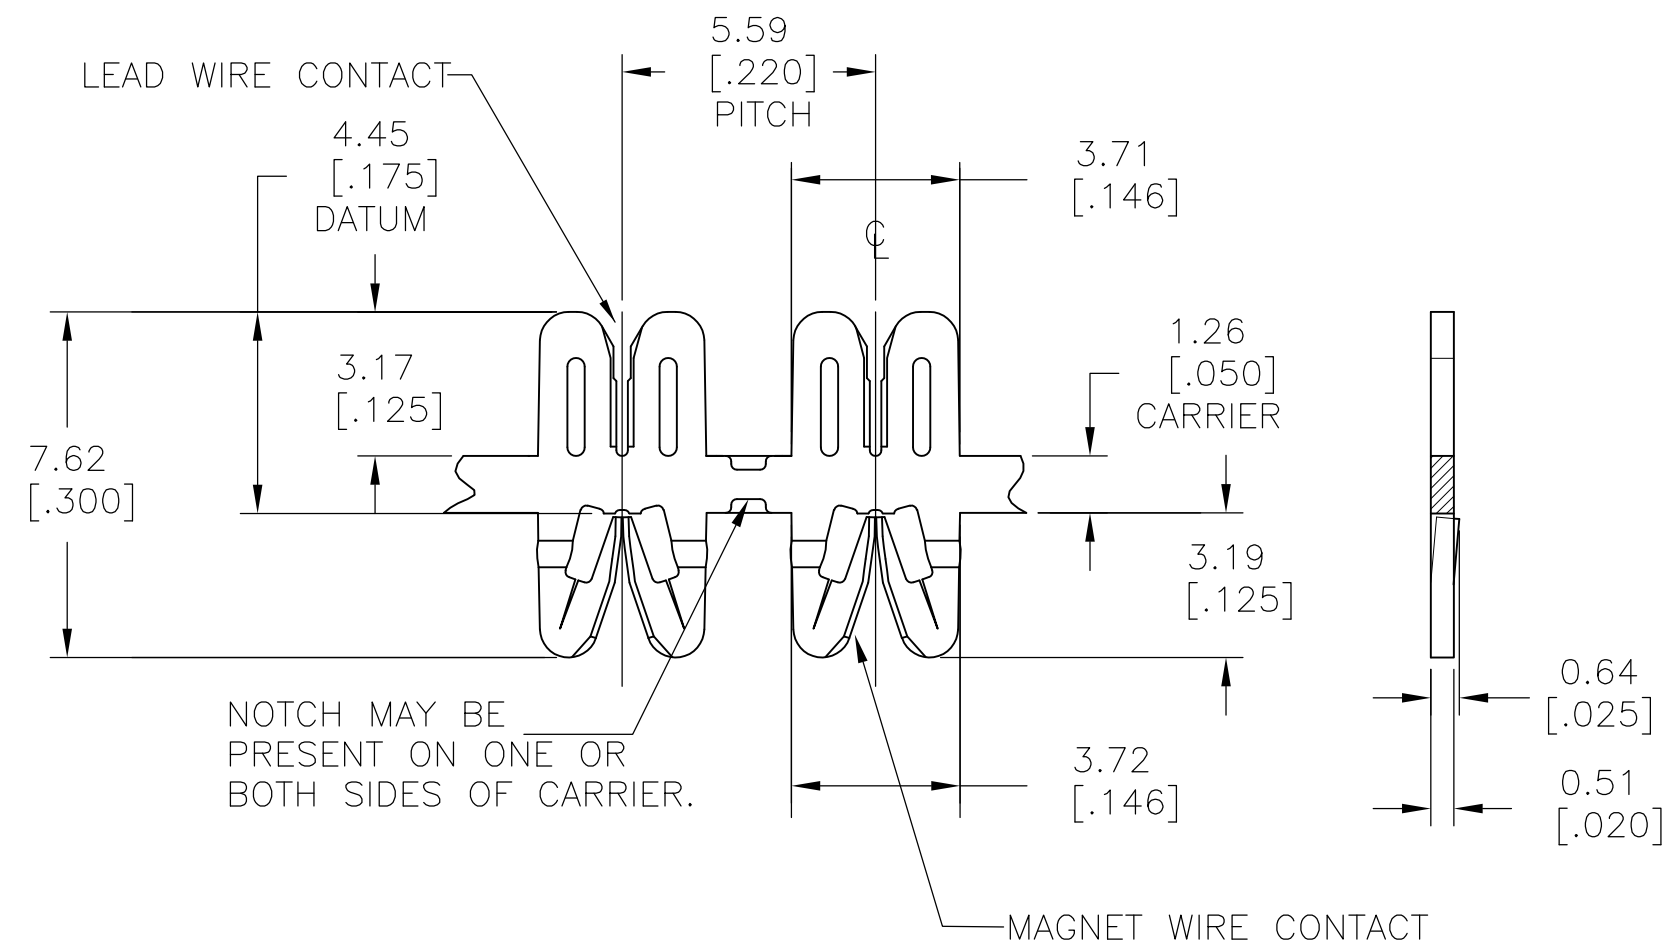

UNPLATED	031-119-000	4-1601056-1
UNPLATED	-	3-1601056-1
UNPLATED	131-120-000	2-1601056-1
UNPLATED	131-119-000	1601056-1
FINISH	REFERENCE PART NUMBER	TE PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	J.WELLER	11JAN2002	Tyco Electronics Corporation Harrisburg, PA 17105-3608
DIMENSIONS: mm [INCHES]		CHK	M.FEHER	11JAN2002	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	K.RANDOLPH	11JAN2002	
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13[.005] 3 PLC ± - 4 PLC ± - ANGLES ± 2°		NAME	STANDARD RANGE WIRE TO 20 AWG. SEMI-RIGID I.D.C. SIAMEZE TERMINAL		
MATERIAL: BRASS, SPRING HARD		FINISH	SEE TABLE	WEIGHT	-
CUSTOMER DRAWING		SCALE	6:1	SHEET	1 OF 1