

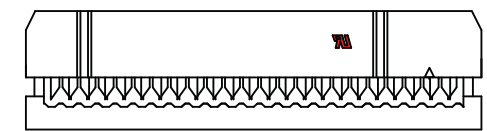
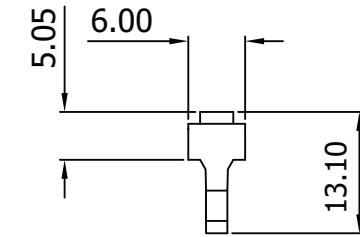
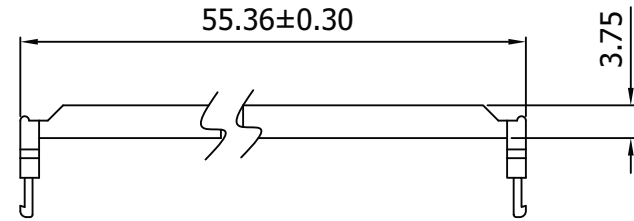


A





A

B

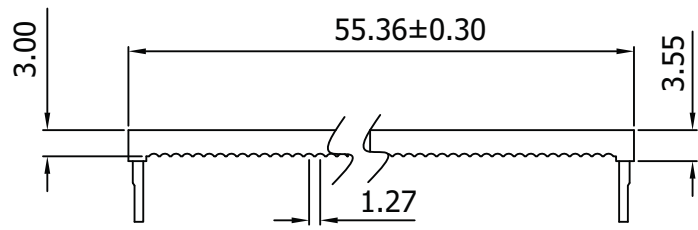


B

C

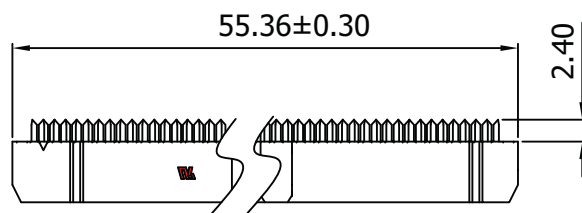

C

D

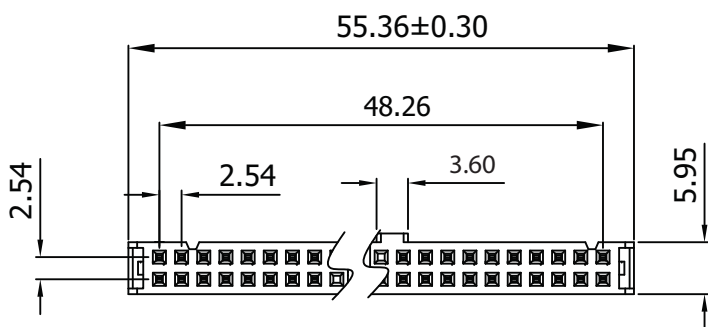

Material:

- Insulator: P.B.T. 30% Glass Fiber, UL 94V-0
- Contact Material: Phosphor Bronze, Gold flash over Nickel

Electrical:

- Current Rating: 1Amp
- Insulation Resistance: 1,000MΩ Min.
- Contact Resistance: 30MΩ Max.
- Dielectric Withstanding: 500V AC
- Operating Temperature: -40°C ~ +85°C

D

E


F

Unit: MM±0.20MM

E

F

G

Scale	1:1					Name	Item No.
TOLERANCE					Drawn	10.19.11	AWP40-7241-T-R
X.X	±0.40				Approved		
X.XX	±0.25						Title IDC-Socket - 2.54MM Pitch, Gold Flash, Central Lug w/Strain Relief, 40 Contacts
X.XXX	±0.15						Drawing No.
Angle	±3°						rev00
							Replace
							Sheet
		Modification	Date	Name			



G

H

H