



**P1**



**P2**

PIN ASSIGNMENT		
P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4+5	BLACK	4
SHELL	DRAIN + BRAID	SHELL

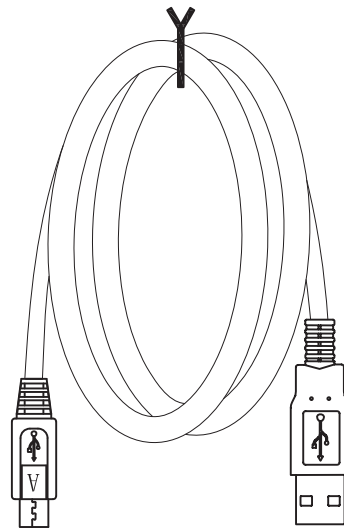

**Material:**

- Cable: USB2.0 UL2725 [28AWG(7/0.12TC+AL)\*1P+ 28AWG(7/0.12TC)\*2C]+AEB(48B TC)
  - Jacket: Black
  - OD: 3.5MM
- Connector: Micro USB 5P A/M Solder Type
  - Shell: Nickel
  - Pin: G/F
  - Insulator Color: White
- Outer Jacket: Black PVC-50P

**Electrical:**

- 100% short, open, miswire test
- Conduct resistance: 3Ω Max.
- Insulation resistance: 20MΩ Min.
- Hi-Pot test: 300V DC

⊕ = Assmann logo



<i>ITEM NO.</i>	<b>AK67321-0.5-R</b>
<i>TITLE</i>	USB2.0 Micro Connection Cable, 0.5 Meter USB A Micro Male <=> USB A Male

**ASSMANN**  
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
Toll Free: 1-877-277-6266 • eMail: info@assmann.us

THIS DRAWING IS UNPUBLISHED  
©Copyright 2009 by Assmann Electronic Components  
All International Rights Reserved