


FB-EM-30344-000

SHEET 2.1

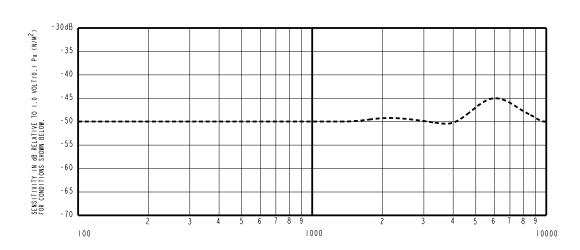


FREQUENCY IN HERTZ

	SENSTITUTIY					
FREQUENCY	MIN.	NOM.	MAX		ONFORMITY	
300		-50.0		RANGE OF DEVIA	TION FROM	IKHz
1000	-54.0	-50.0	- 46	- 4 . 0	+4.0	
2000		-49.5		0.0	0.0	
6000		-45.5		- 4 . 0		
				0.0	+9	

## NOTES:

- I. MICROPHONE TO BE FUNCTIONAL WITH 10 VDC SUPPLY.
- 2. SENSITIVITY VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.
- 3. TEST CONDITIONS:
  HEAD OF BOOM EXPOSED TO 74 dBSPL SWEPT
  SOUND FIELD AT 6mm FROM VOICE APERTURE.
  ARTIFICIAL VOICE:
  B & k 4227 MOUTH SIMULATOR.
- 4. FOR MICROPHONE CAPSULE SPEC. SEE DRAWING NR-25994-D63 SHEET 2.1.
- 5. SURVIVES SUBMERSION IN 10m OF WATER FOR 5 MINYTES; SENSITIVITY WITHIN 34B OF INITIAL SENSITIVITY AFTER DRIED FOR 30 MINUTES AT ROOM TEMPERATURE.





LEAD IDENTIFICATION & TEST CIRCUIT

	Revision	C.O. #	Implementation Date	RELEASE LEVEL		REVISION
					0	
	В	C10107748	8-12-08	l Active	K	
	Α	C10107368	5-27-08	***************************************		נ
1				INSPECTION ACCEPTANCE/REJECTION	DR. BY	DATE

KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.

NHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION

CRITERIA. CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR

TITLE:

BOOM MICROPHONE FB-EM-30344-000

GJP 6-4-08

APP. 81 DATE

SHT 2.1

6 - 4 - 08

PERFORMANCE SPECIFICATION