

1259

EXPLOSION-PROOF

- Will not cause an explosion in certain ignitable gas-air and dust-air atmospheres*



BRIGHT

- 7-lumen light output with Eveready® SHD batteries (9 lumens with Energizer® MAX®)



RELIABLE

- Light for 4 hours of continuous use with Eveready® SHD batteries (21 hours with Energizer® MAX®) Lifetime guarantee



NON-CONDUCTIVE

- Protects user from immediate electric shock



MSHA approved for use in methane-air mixture and UL listed for Division I and II, Class I, Group C and D environments. *For use in gas-air mixtures of Acetone, Butane, Benzene, Diethyl Ether, Ethyl and methyl Alcohols, Gasoline, Methane (natural gas), Naphtha and Propane. Approved also for use in dust-air mixtures of Class II, Group G. Designed so that if lamp is broken, electrical circuit will be opened before filament can ignite these flammable or explosive gas-air mixtures in the surrounding atmosphere.



WARNING:


USE ONLY PR3 STYLE BULBS AND 2 SIZE "D" 1.5 VOLT CARBON ZINC BATTERIES.
RISK OF EXPLOSION – DO NOT OPEN IN HAZARDOUS AREA. TO PREVENT THE IGNITION OF A HAZARDOUS ATMOSPHERE, BATTERIES MUST ONLY BE CHANGED IN AN AREA KNOWN TO BE NON-HAZARDOUS.

Before Using Your Flashlight:
Please read all instructions and cautionary markings on the package and light

Product Detail:

Designation:	Energizer Industrial 2D Mine Safety Light
Model:	1259
Color:	Safety Orange
Power Source:	Two "D"
ANSI/NEDA:	Series 13D or 13
Lamp:	PR2 or PR6
Lamp Rating:	3.6V, 0.5A
Lamp Life (hr):	15
Lamp Output (lumens):	7 - Carbon Zinc, 9 - Alkaline
Beam Distance (m):	40 - Carbon Zinc or Alkaline
Peak Beam Intensity (cd):	400 - Carbon Zinc or Alkaline
Run Time (h:mm):	4 - Carbon Zinc, - 21 Alkaline
Typical Weight:	113 grams without batteries
Dimensions (mm):	203 x 60

Performance:

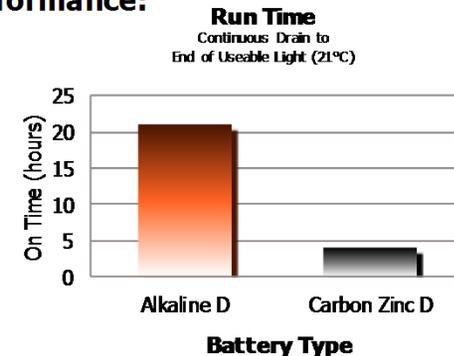

Tested according to ANSI/NEMA FL 1 Standards.

Important Notice

This datasheet contains information specific to products manufactured at the time of its publication
Contents herein do not constitute a warranty
©Energizer / All Rights Reserved