


KEMET Part Number: T409G106K025BC
(CWR09KC106KB)

Capacitor, Tantalum, 10 uF, 6728, +/-10% Tol, -55/+125C, 25 VDC (85C), Failure Rate=B (0.1%/1000 Hrs)

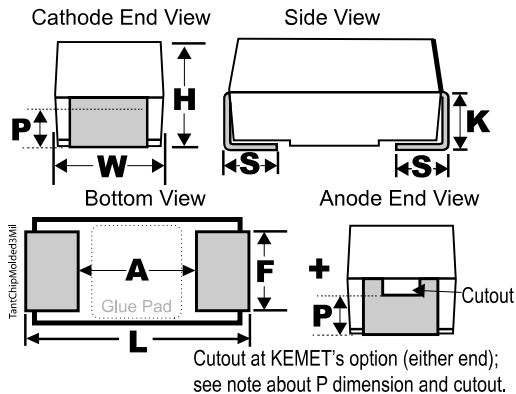

General Information	
Supplier:	KEMET
Application:	MIL-PRF-55365/4
Part Type Description:	SMD, MnO ₂ , Molded, Military Equivalent
Construction:	Standard Chip-MnO ₂
Body Type:	SMD Chip
Termination:	Hot Solder Dipped
Footprint:	6728
Weight:	266.42 mg
Approvals:	MIL-PRF-55365/4, CWR09 Style
RoHS:	No

Dimensions (mm)		
Symbol	Dimension	Tolerance
L	6.73	+/-0.38
W	2.79	+/-0.38
H	2.79	+/-0.38
K	1.52	MIN
F	2.67	+/-0.13
S	1.27	+0.025/-0.13
P	0.76	MIN
A	4.19	NOM

Specifications	
Capacitance:	10 uF
Tolerance:	+/-10%
Voltage:	25 VDC (85C)
Voltage:	16.75 VDC (125C)
Temperature Range:	-55/+125C
Testing:	Standard Testing Only
Resistance/ESR:	1.4 Ohms (100kHz)
Failure Rate:	B (0.1%/1000 Hrs)
Leakage Current:	3 uA
Dissipation Factor:	6%

Notes:

-Note: When Option C Is Selected For Lead Material, Add An Additional 0.38mm To The Tolerances For "L", "W", "H", "K", "F" And "S"

-P And R Dimensions Represents The Minimum Solderable Area Of The Termination Surface Entirely Below Cutout (If One Is Present)

Packaging Specifications	
Package Kind:	T&R
Package Size:	7 in/180 mm
Package Quantity:	500